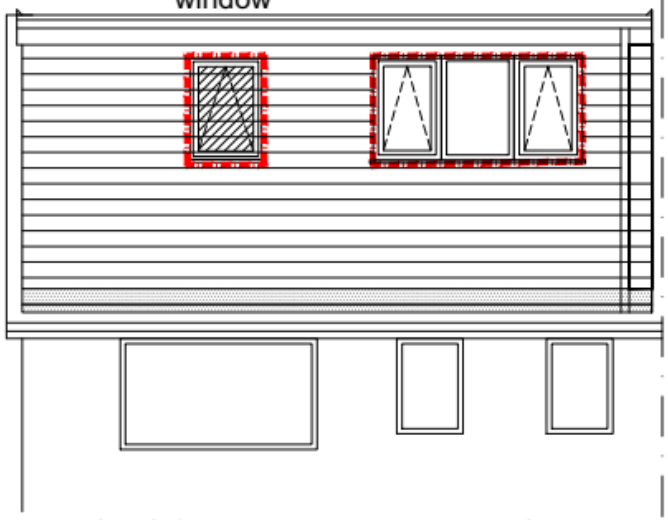


PROPOSED REAR ELEVATION

FD30S NOTE:

All doors to ground and first floor leading into habitable rooms to be FD30S.

Fire-resisting door to BS 476:Part22:1987. Fire rated period stated in minutes. S indicates smoke rated to BS 5588:Part 3:1983 AMD 6160 para 9.6.2(b).


Each installed door assembly certified to the specified fire resistance in accordance with BS 8214,1990.

30m²	Loft Area

NOTE:
GLAZING BELOW 800mm TO BE TOUGHENED GLASS TO WITHSTAND IMPACT LOADING TO COMPLY WITH PART K OF THE APPROVED DOCUMENTS.


ROCKWOOL FIRE BARRIERS TO BE INSTALLED TO ALL OPENINGS AND 300mm FROM EXTERNAL CORNERS.

NOTE:
SPREADER BEAM TO BE INSTALLED OVER THE GABLE WINDOW

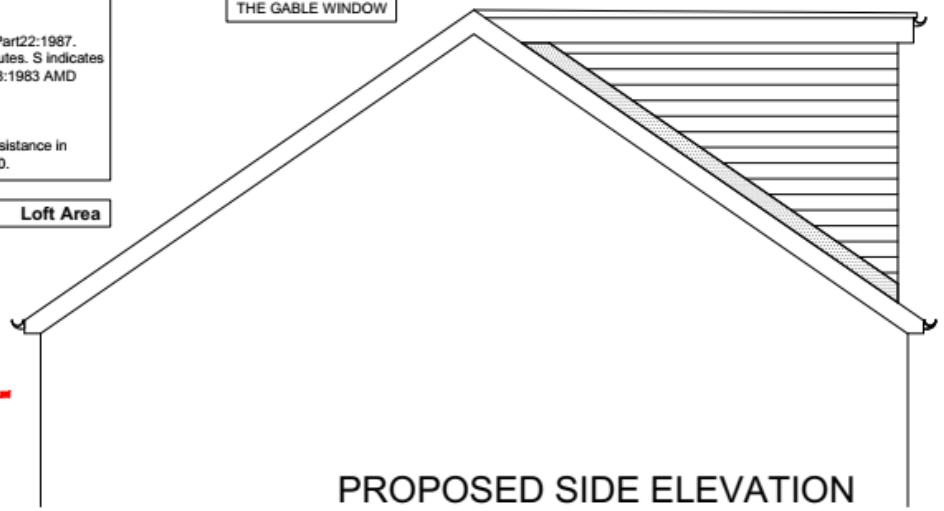

PROPOSED SIDE ELEVATION

FLAT ROOF VERGE CONSTRUCTION :
UPVC fascia with ventilated soffit fixed back to facing brickwork. 125mm high treated softwood timber fillet fixed to plywood to form upstand and 3No. layers of bitumen meneral felt fillet to be dressed over. 28x44mm treated softwood batten fixed to face of fascia to extend felt over. All to manufacturers reccommendations.

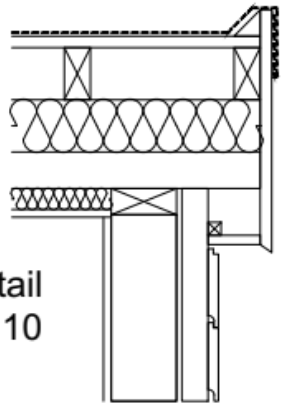

Verge Detail
scale 1:10

PART 'P' ELECTRICS :
LIGHTING AND ELECTRICS
- A min. of 1 of the new rooms (eg. the WC facility) is to have energy efficient lighting new lighting (ie. to have initial lamp plus ballast efficacy of not less than 40 lamp-lumens per circuit-watt.
- All lighting to be switched locally.
- All new electrics to meet the requirements of approved document P of the Building Regulations. The electrics must be designed, installed and inspected and tested by a person competent to do so. Provide an appropriate BS 7671 certificate if requested by the Building Inspector.

PART 'F'- VENTILATION :
New windows to be provided with through frame ventilation details as follows,
4000mm\2

WC to have 15l/s mechanical ventilation via fan in roof void connecting to ventilation tile.

Mechanical ventilation to kitchen to have 60l/s (30l/s if extracting at cooker hood).

Pitched roofs to be ventilated via 25mm continuous eaves ventilation provided via proprietary strip ventilator. 50mm ventilation maintained above insulation by the use of proprietary rafter roll ventilator units. Roof ventilators may be omitted provided that suitable breathable sarking membrane is utilised, in accordance with manufacturer's recommendations.

INTERNAL STUDWORK WALLS : PART E 'SOUND' :
2 layers of 12.5mm plasterboard each side of 48mm GYPROC metal studs at 400mm centres with 25mm Isowool (min. density 10kg/m3) between outer layer of plasterboard to be GYPROC moisture resistant board to ensuite and bathrooms. All joints and perimeter edges to be well sealed with acoustic seals and to achieve airtightness.

All in accordance with 'Wall Type B' diagram 5-2 of Approved Document E. Min. 1 layer 12.5mm plasterboard either side of min. 45mm metal stud frame with 25mm mineral wool insulation to cavity. (2 layers currently shown therefore exceeds criterion)

PITCHED ROOF EAVES GUTTER & RWP's :
UPVC YEOMAN RAINGUARD 110x55mm gutter supported on UPVC fascia detail drained via YEOMAN STANDARD 50mmØ downpipes.
Colour : BLACK.

STRUCTURAL ITEMS :
All Structural Items including steel beams to Structural Engineers details.

EXISTING WINDOWS TO REAR :
Existing window lintels to be checked by Building Control officer and changed as agreed.